

Ron Newsome - Assistant State Maintenance Engineer - Roadway

2007 RESURFACING PROGRAM

RSF - Total Miles 634 / Total Lane Miles 1536

Mill & Fill Projects (mill 1.50", 155 lbs/sy, 1⁄2" MAS) 403 m / 1012 lane m

Macro-surfacing / Road Armor projects – 77 m • AADT 500 to 5000

MACROSURFACING

2006 PROJECTS 5th Division SR 22, CHILTON CO. MP 75 TO MP 81 SR 159, PICKENS CO., MP 0.4 TO MP 17 SR 14, PICKENS CO., MP 9 TO MP 19

SR 22, CHILTON CO, AUGUST 2006



SR 22, CHILTON CO, AUGUST 2006




SR 22, CHILTON CO, AUGUST 2006



SR 22, CHILTON CO, AUGUST 2007 (One Year Later)



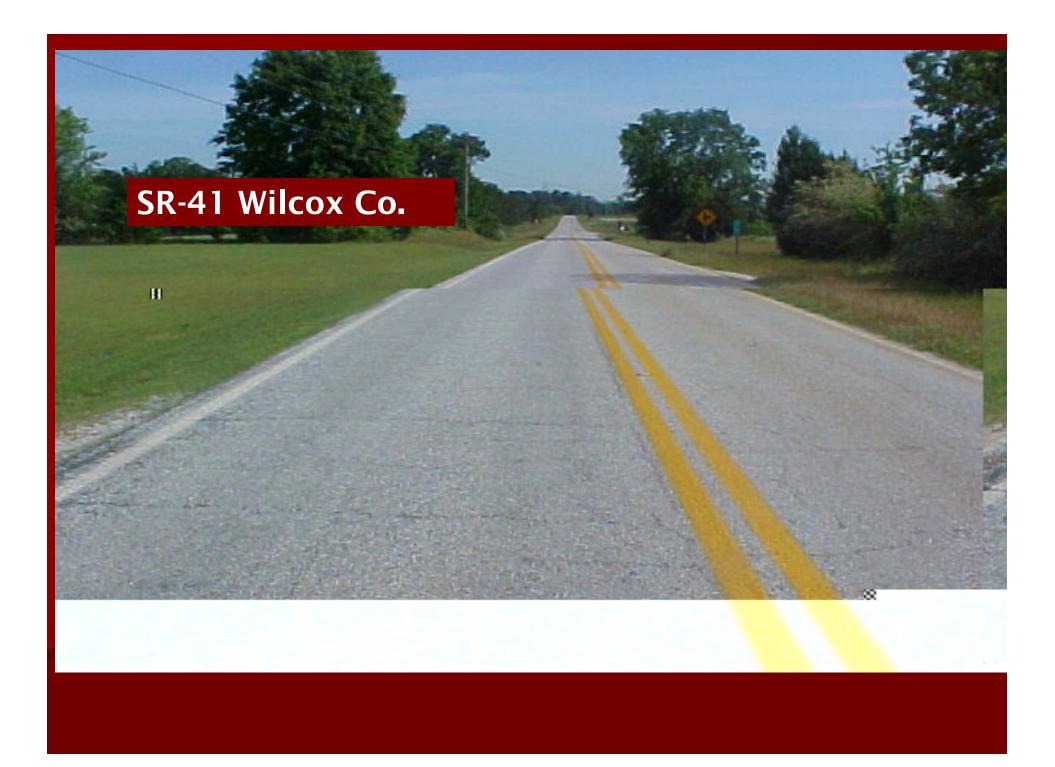





SR41 Wilcox County



SR-41 Wilcox Co. (6.50 m)

Double Surface Treatment - DG

➢ SR-233 Marion Co. 12.8 m - Sept 07

SR-51 Russell Co. 6.0 m - Sept 07

SR51 Russell Co. DG Treatment



SR51 Russell Co. DG Treatment





Conclusion

- It's one of the most cost effective pavement preservation tools when used on the right road at the right time
- We have had some minor problems
 - Raveling/Shearing of the aggregate at certain locations
- Overall
 - Satisfied with it's performance



